





PLAN
(Facing highway)






SEC. A-A

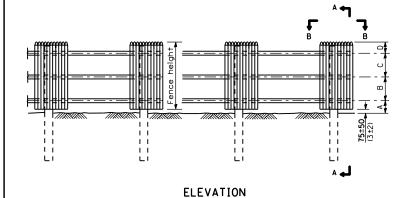




DETAIL A

(Showing typical picket to rail attachment)




SECTION B-B

(Showing typical panel to post connection at each rail.)



(Showing treatment with sloping ground)



SECTION C-C

(Notch pickets when required to clear washer and bolt head.)

GENERAL NOTES

Loading was based on 130 km/h (80 mph) with 30% gust factor. Minimum allowable soil pressure = 120 kPa (1.25 tsf).

Timber sizes given are dry dressed (nominal) sizes.

All dimensions are in millimeters (inches) unless otherwise shown.

DATE	REVISIONS	SIGHT SCREEN
1-1-97	Renum. Standard 2367-3.	CEDAR STOCKADE FENCE
	Deleted DN Symbol.	
		TYPE S
11-1-94	Rev. GENERAL NOTES.	
	Added table of dim.	STANDARD 641001
		01741D741D 011001

